

GP2D02

Compact, High Sensitive Distance Measuring Sensor

■ Features


1. Impervious to color and reflectivity of reflective object
2. High precision distance measurement output for direct connection to microcomputer
3. Low dissipation current at OFF-state
(dissipation current at OFF-state : TYP. 3 μ A)
4. Capable of changing of distance measuring range through change the optical portion (lens)

■ Applications

1. Sanitary sensors
2. Human body sensors for consumer products such as electric fans and air conditioners
3. Garage sensors
* PSD : Position Sensitive Detector

■ Outline Dimensions

(Unit : mm)

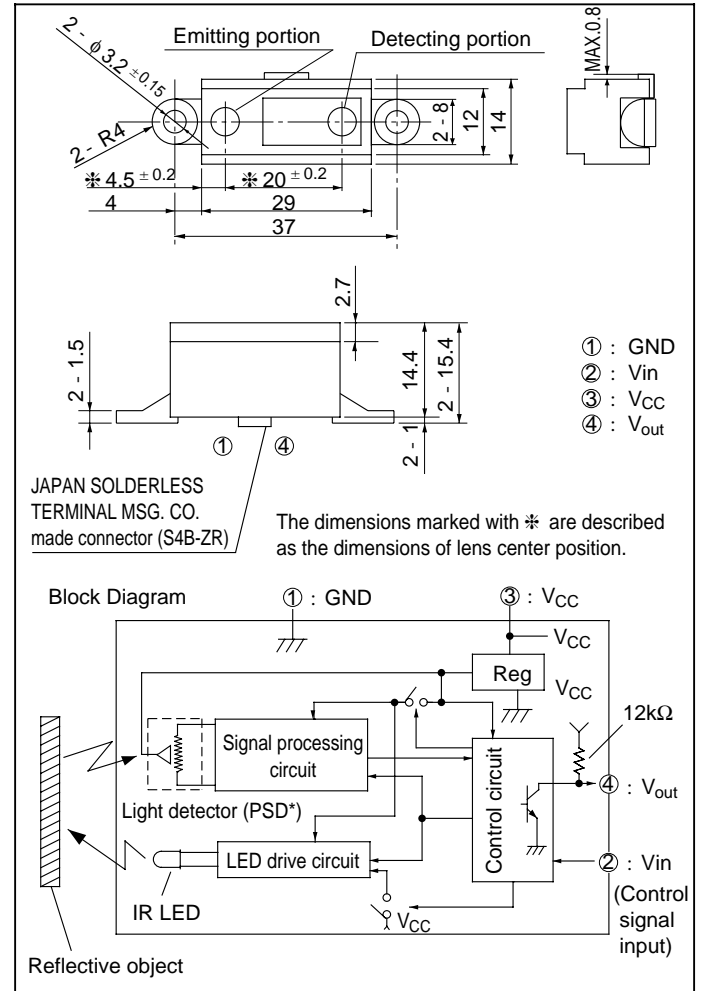

■ Absolute Maximum Ratings (Ta=25°C, V_{CC}=5V)

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	- 0.3 to + 10	V
*1 Input terminal voltage	V_{in}	- 0.3 to + 3	V
Output terminal voltage	BV_O	- 0.3 to + 10	V
Operating temperature	T_{opr}	- 10 to + 60	°C
Storage temperature	T_{stg}	- 40 to + 70	°C

*1 Open drain operation input

■ Operating Supply Voltage

Symbol	Rating	Unit
V_{CC}	4.4 to 7	V

" In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device."

Electro-optical Characteristics

(Ta=25°C, Vcc=5V)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Distance measuring range		ΔL	*1	10	-	80	cm
Output terminal voltage		V_{OH}	Output voltage at High	$V_{CC} - 0.3$	-	-	V
		V_{OL}	Output voltage at Low				
Distance characteristics of output		D	L = 80cm, *1	-	75	-	DEC
		ΔD	Output change at L=80 cm to 20 cm,*1	48	58	68	DEC
Dissipation current	at operating	I_{CC}	L = 20cm, *1, *2	-	22	35	mA
	at OFF-state	I_{off}	L = 20cm, *1	-	3	8	μA
Vin terminal current		I_{vin}	Vin = 0V	-	- 170	- 280	μA

Note) L : Distance to reflective object

DEC : Decimalized value of sensor output (8-bit serial)

*1 Reflective object : White paper (reflectivity : 90%)

*2 Average dissipation current value during distance measuring operation when detecting of input signal, Vin as shown in the timing chart


*3 Vin terminal : Open drain drive input.

Conditions : Vin terminal current at Vin OFF-state : -1 μA


Vin terminal current at Vin ON-state : 0.3V

Test Circuit

1. Test circuit

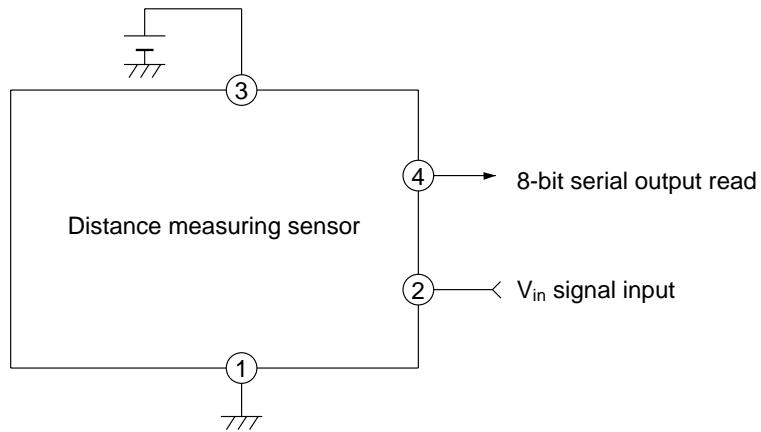

2. Vin input signal for measurement

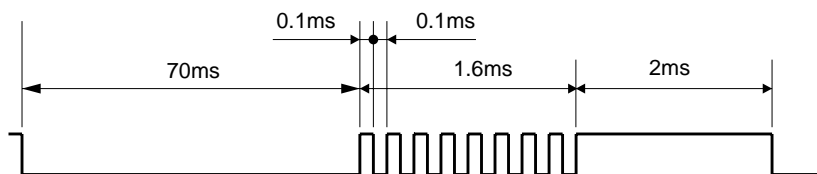

■ Timing Chart

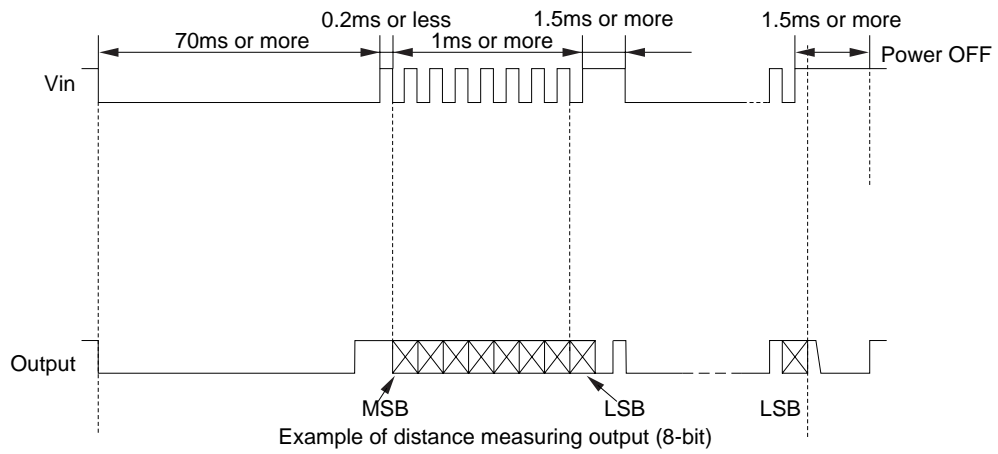


Fig. 1 Distance Measuring Output vs. Distance to Reflective Object


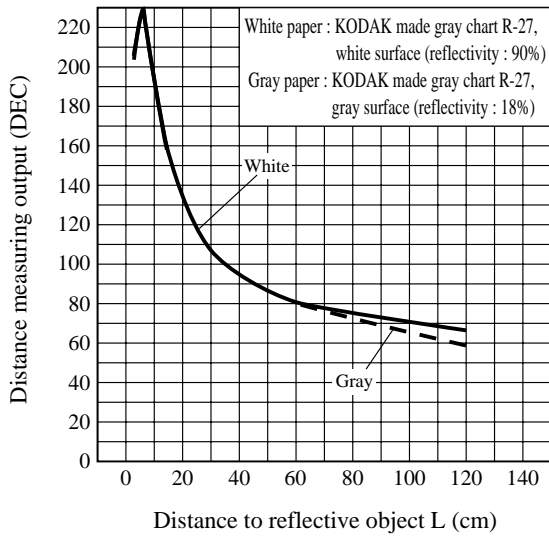


Fig. 2 Detection Distance vs. Sensing Range

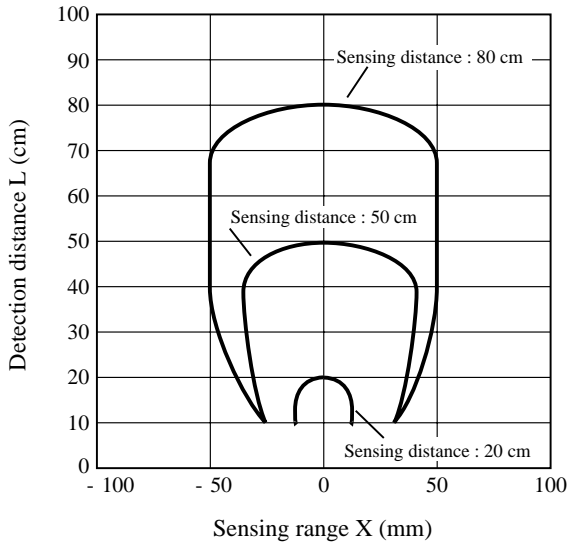

Test Method for Sensing Range Characteristics


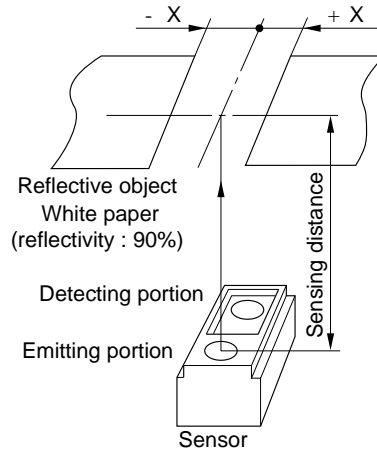


Fig. 3 Detection Distance vs. Illuminance



Test Method for Anti External Disturbing Light Characteristics

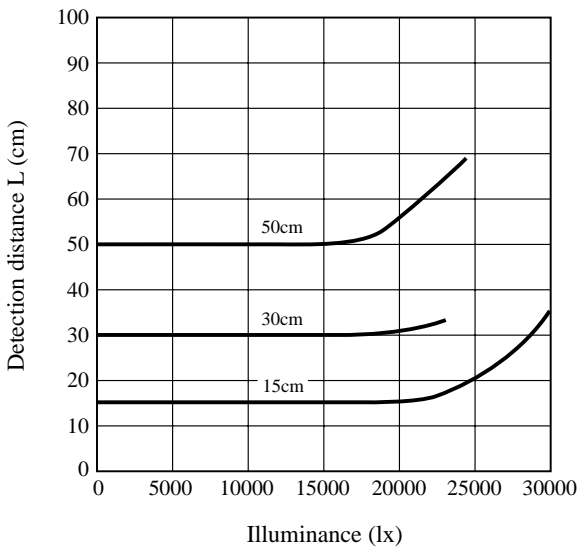